
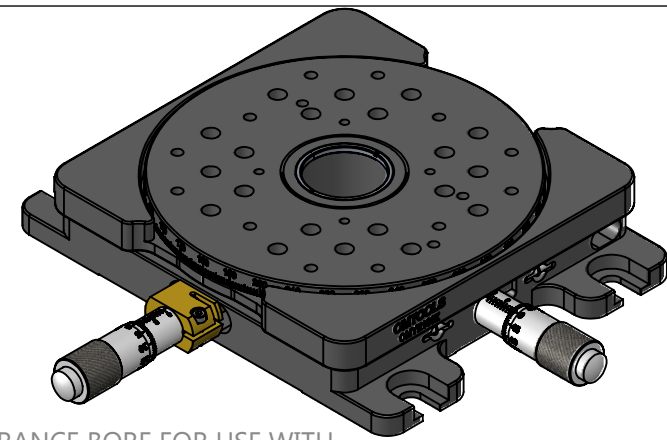



ROTATION LOCKING SCREW

NYLON TIPPED


2mm [5/64] HEX

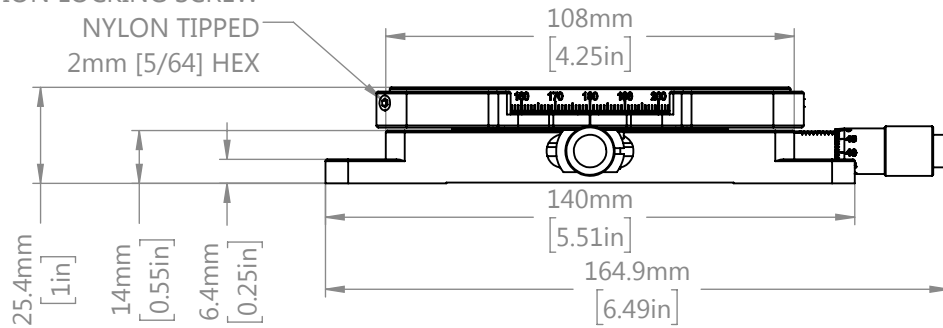

8.55mm [0.34in]

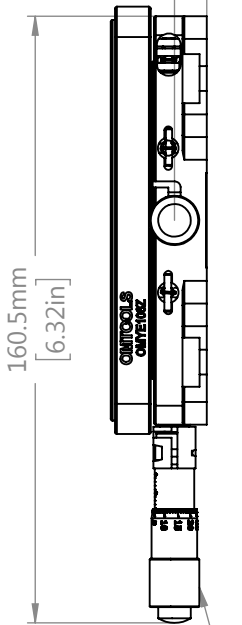


M4 THERAD  
12.5mm [0.49in] MA X DEPTH  
8 PLACES

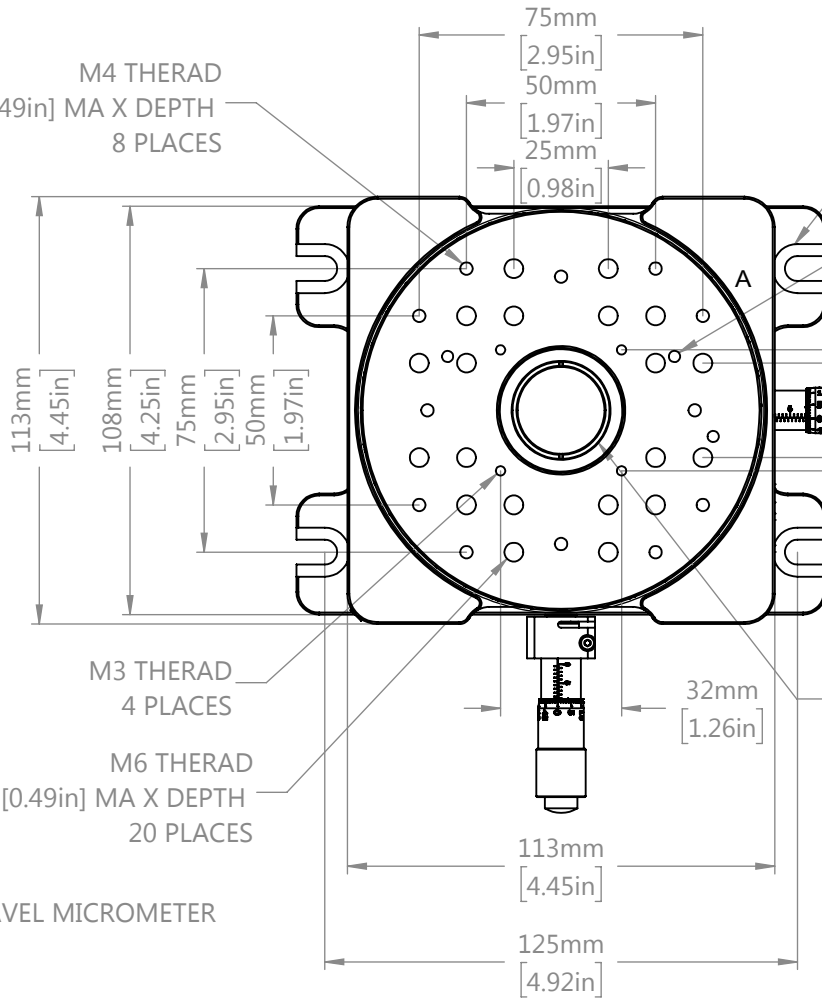

CLEARANCE BORE FOR USE WITH  
M6 [1/4-20] CAP SCREW  
4 PLACES  
ALIGNMENT HOLE FOR USE  
WITH Ø3.0mm DOWEL PINS  
FOR CENTERING OF SLIDES  
3 PLACES [PINS NOT INCLUDED]

DETAIL A  
SCALE 1:2

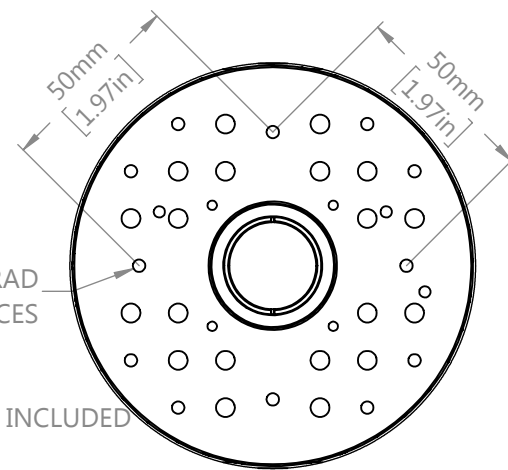

M3 THERAD  
4 PLACES

M6 THERAD  
12.5mm [0.49in] MA X DEPTH  
20 PLACES

SM1(Ø1.035-40mm) SERIES  
EXTERNAL THREAD  
OMSPJ25A RETAINING RING INCLUDED  
2.0MM [0.08in] THICK  
Ø23mm[0.91in] CLEAR APERTURE

13mm[1/2in] TRAVEL MICROMETER  
2 PLACES

DRAWING PROJECTION

REV A0

DRAWN HSY

DATE 2021/8/5

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

**OMTOOLS**

OMYE106Z

WEIGHT

0.72kg

SCALE

1:2